

polylac

*excellent
scratch resistance*



Exclusive | Ecological | Resistant



by **gizir**
WOOD PRODUCTS



Worldwide
in over
80
countries



Reliability

Reliability is the overall brand promise at Gizir. In fact, it is our most important commitment to our customers.



Quality

We, at Gizir, strive to provide our customers with products and service that meet and even exceed their expectations.



Design


We are always inspired from nature while creating new materials.

gizir[®]
WOOD
PRODUCTS

What is *polylac* ?

Polylac is an ecological multi-layered decorative panel with the "highest scratch, stain, heat, and chemical resistance" on the market.

It also has the highest gloss level with a "99GU" gloss rating.
Still achieving a "3.0 Newton (class 4B)" scratch resistance rating.
Six times the scratch resistance of some acrylics in the industry!

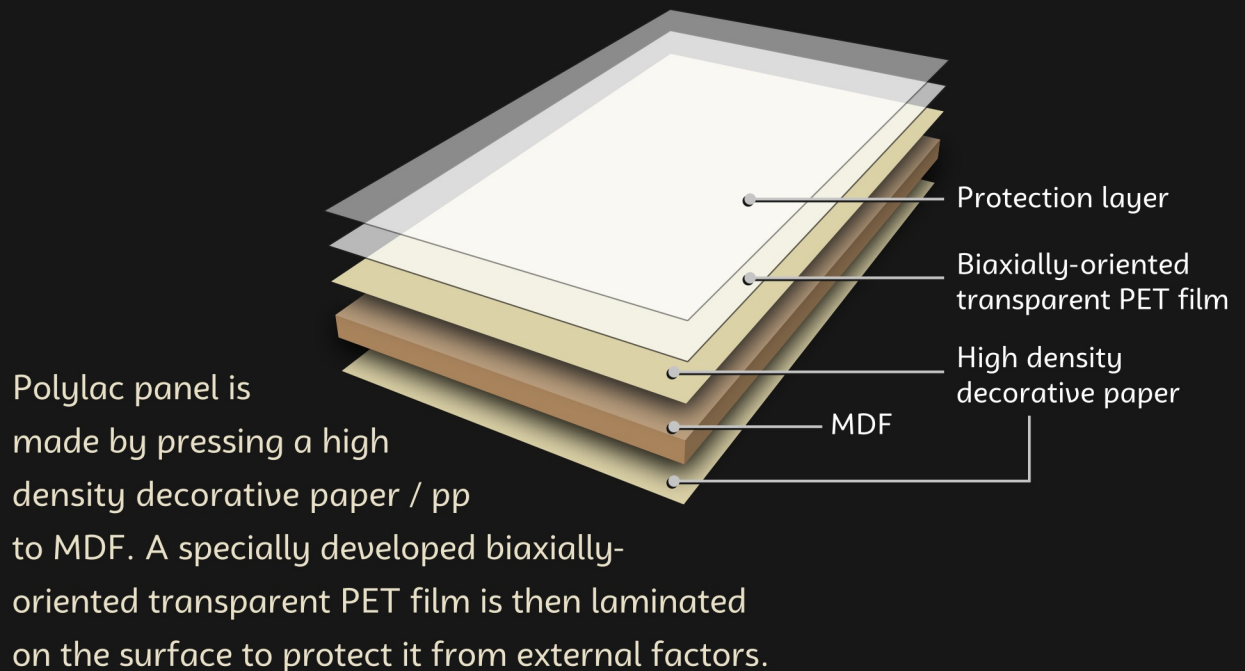

High gloss with
mirror-like reflection



Excellent
scratch resistance


Smooth surface
& depth effect



Features

- ★ **High gloss** with mirror like finish
- ★ **Scratch**, stain & heat resistant
- ★ **Smooth surface** and depth effect
- ★ Cuts **without cracking** or chipping
- ★ **100% PVC free**
- ★ **Very easy to clean** and maintain
- ★ **Elegant** European designs
- ★ **Matching** acrylic and ABS edge tape
- ★ **Two-toned** brushed aluminum with color edge tape

Where to use



Why *polylac* ?

- 1** In the decorative panel industry, high gloss levels are easy to achieve, however, the higher the gloss, the lower the scratch resistance.
Polylac, through extensive testing, has proved superior levels of glossiness while maintaining a very high scratch resistance.
- 2** Other panels might crack and chip during the manufacturing process.
Polylac, due to its flexible PET film, will not crack or chip, thus making the edge banding process simple.
- 3** While most of the other products deteriorate in time,
Polylac panels retain their original state without changing, cracking, or fading.

Making Polylac the ideal sustainable material for all your needs.

polylac
matte & glossy

Polylac panel dimensions (mm): 18x1220x2800 / 8x1220x2800

Matching edgebanding: Acrylic (single color / double color), ABS



9111



9112



9120



9122



9130



9131



9132



9140

polylac
matte & glossy



9141



9142



9160



9161



9162



9170




9171




9172

polylac
matte & glossy




9513



9523




9525




9527



9528



9545



9543



9530



9570

Unlimited possibilities ∞

Polylac comes in many different beautiful colors and patterns, and with Polylac's digital image capabilities, we can produce **marble, leather, wood, custom colors, logos...anything!**

All Polylac products come with the same industry-leading gloss rating, durability, and reliability. Matte finish PET also available.

For more details: www.polylac.com.tr

polylac
DIGITAL
matte & glossy



8023




8029



8034



8035



8036



8039



8040



8409

Matching edgebanding: Digital print edge tape

polylac
DIGITAL
matte & glossy

*With our digital capabilities
"anything is possible"*




8419



8420



8421

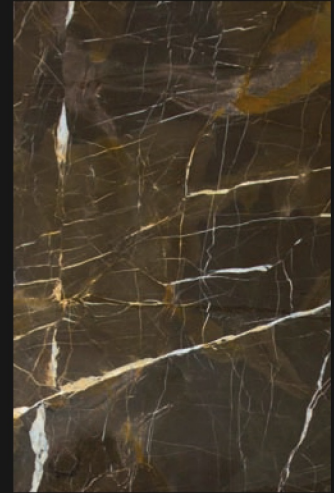

8505




8511



8515



8521

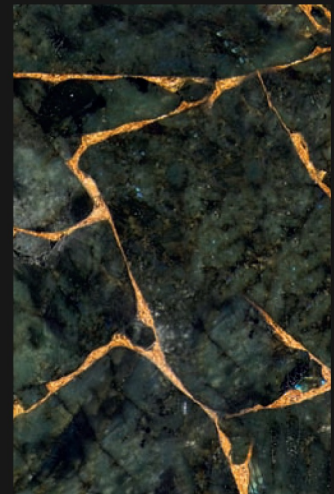

8522

polylac
DIGITAL
matte & glossy


*With our digital capabilities
"anything is possible"*



8503



8541

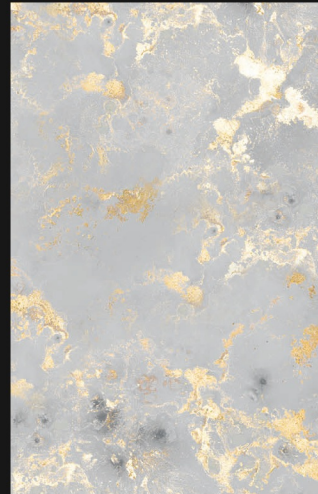

8545



8555



polylac

Test Results



JIS Z 2801 & ASTM G21
★ CERTIFIED! ★



| No | FEATURE | RESULT | STANDARD |
|----|--|---|--------------------|
| 1 | Gloss level (60° angle) | 99 GU | EN 14323 part 5.13 |
| 2 | Scratch resistance | 3,0 Newton (Class 4B) | DIN 68861 part 4 |
| 3 | Assessment of surface resistance to wet heat (100°C) | 5 (No change) | EN 12721:09 |
| 4 | Assessment of surface resistance to dry heat (140°C) | 5 (No change) | EN 12722:09 |
| 5 | Surface abrasion resistance | 4500 rev. (Class 4) | EN 14323 cls. 5.9 |
| 6 | Behavior towards impact loading by falling steel ball | No cracking | EN 14323 cls. 5.14 |
| 7 | Test of water steam resistance | 5 (No change) | EN 14323 cls. 5.11 |
| 8 | Resistance to staining | 5 (No change) | EN 14323 cls. 5.6 |
| 9 | Assessment of surface resistance to chemical cold liquids (Acetic acid, acetone, ammonia solution, citric acid, cleaning agent, etc.) | 5 (No change) | EN 12720:10 |
| 10 | Colorfastness to light | 4 / 5. Grade | EN 15187 |
| 11 | Bending strength (*) | 32 N / mm ² | EN 310 |
| 12 | Modulus of elasticity in bending (*) | 4441 N / mm ² | EN 310 |
| 13 | Surface soundness (tensile strength) (*) | 1,36 N / mm ² | EN 311 |
| 14 | Tensile strength vertical to the surface (*) | 0,54 N / mm ² | EN 319 |
| 15 | Thickness tolerance | ± 0,5 mm | Gizir |
| 16 | Bow tolerance | 2,2 mm / 1 m | Gizir |
| 17 | Cold check (40 cycles, 1 h 60°C, 15 min. room temp., 1 h - 30°C, 15 min. room temp.) | No damage | TSE |
| 18 | Antimicrobial Products – Test for Antimicrobial Activity and Efficacy | E.coli / Sa.aureus ≥2 (suitable) | JIS Z 2801 |
| 19 | Standard Practice for Determining Resistance of Synthetic Polymeric Materials to Fungi | 0 growth at 7, 14, 21 and 28 days (suitable) | ASTM G21 |

- (*) These values are weighted average of the test results.



يجب بانل

شارع التزولي مؤسسة الزكاة
خلف نادي بركة الحاج الرياضي
القاهرة - مصر

EGYPT PANNEL™

egyptpanel.com
+20 10 222 40 611