

Decoriva

REDEFINING COMFORT AND STYLE



Decoriva

REDEFINING COMFORT AND STYLE

Transform your spaces with our innovative range of wall panels, special lamination that brings out the best in design and functionality.

Our collection is crafted to cater to diverse tastes and styles, ensuring that every panel not only enhances the aesthetic appeal but also adds a unique touch to your interiors. These versatile panels offer endless creative possibilities and are easy to install, allowing for stunning transformations with minimal effort.

Made from *High-quality Materials*, they ensure durability and longevity, making your spaces not only beautiful but also practical. With a wide range of textures, colours, and finishes, you can create tailored interiors that reflect your unique vision. Designed to be low-maintenance and easy to clean, our panels keep your spaces looking beautiful with minimal upkeep.

Additionally, they offer excellent insulation properties, enhancing the comfort and energy efficiency of your space. Our panels are also flexible, easily taking curves to fit any design requirement. Furthermore, our extensive collection includes panels specifically designed for areas exposed to water and for outdoor use, ensuring durability and style in every environment. Experience the joy of spaces that not only look stunning but also feel inviting and comfortable.

FABRIC SERIES

The space that draws attention without adding eye-catching decorations, an interior that appears careless but never misses even the smallest details fabric complete with its everchanging combinations of trendy colors and patterns, express your own unique sensibility.

This image is for illustrational purpose only, and the real product may be different.



FCL6603



This image is for illustrational purpose only, and the real product may be different.




FCL6601



FCL6604



This image is for illustrational purpose only, and the real product may be different.

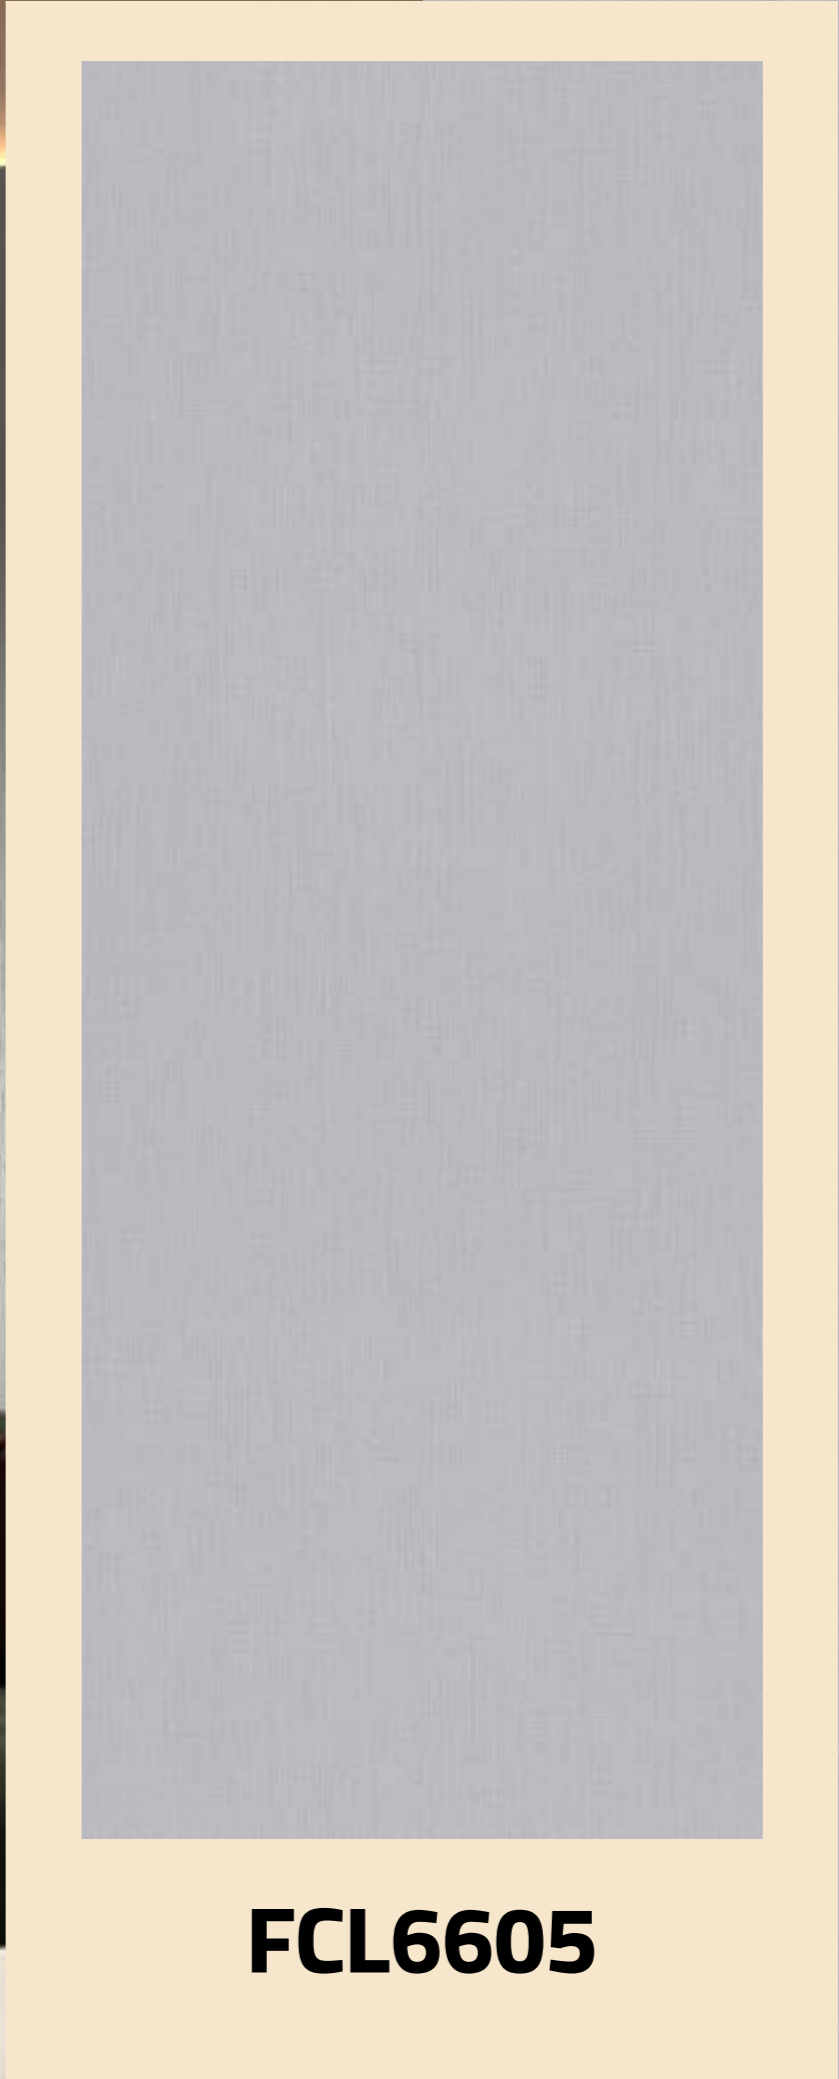

FCL6605



This image is for illustrational purpose only, and the real product may be different.

FCP6803



This image is for illustrational purpose only, and the real product may be different.



NATURAL
TEXTURE



TECHNICAL SPECS FABRIC

	Properties	Test	Unit	Value
Physical	Density	INHOUSE	KG/MC	600-950
	Hardness	ISO 868	Shore D	46±2
	Water Absorption	ASTM D 570	%	≤0.8
	Tensile Strength	ASTM D 638	MPa	≥17
Mechanical & Electrical	Elongation at break	ASTM D 638	%	≥17
	Charpy Impact Strength	ASTM D 256	J/m	29
	Izod Impact Strength	ASTM D 258	KJ/	≥9.0
	Dielectric Strength	ASTM D 257	Ω M ²	5 × 10
	Coolness hardness	GB/T6739-2006	2H	2H
	Yellowing Resistance	GB/T23983-2009	AE:1.26	AE:1.26
Thermal	Vicat Softening Temperature	ASTM D 648	°C	≥80
	Coefficient of Linear Expansion	ASTM D 1525	Cm/Cm	06-07
	Thermal Conductivity	DIN 52616	W/mk	0.5-0.7

WOOD SERIES

Variety of changes made with wood full of sensibility.

Wood which never goes out of style is an element that matches every space.

It is the most fundamental yet the most wide-ranged item.

We invite you to the world of wood which always presents a new interpretation of the familiar grain, color and texture.

A majestic tree now decorate your space.



WDG103T



WDG5215




WDT6108



WDT6111



This image is for illustrational purpose only, and the real product may be different.

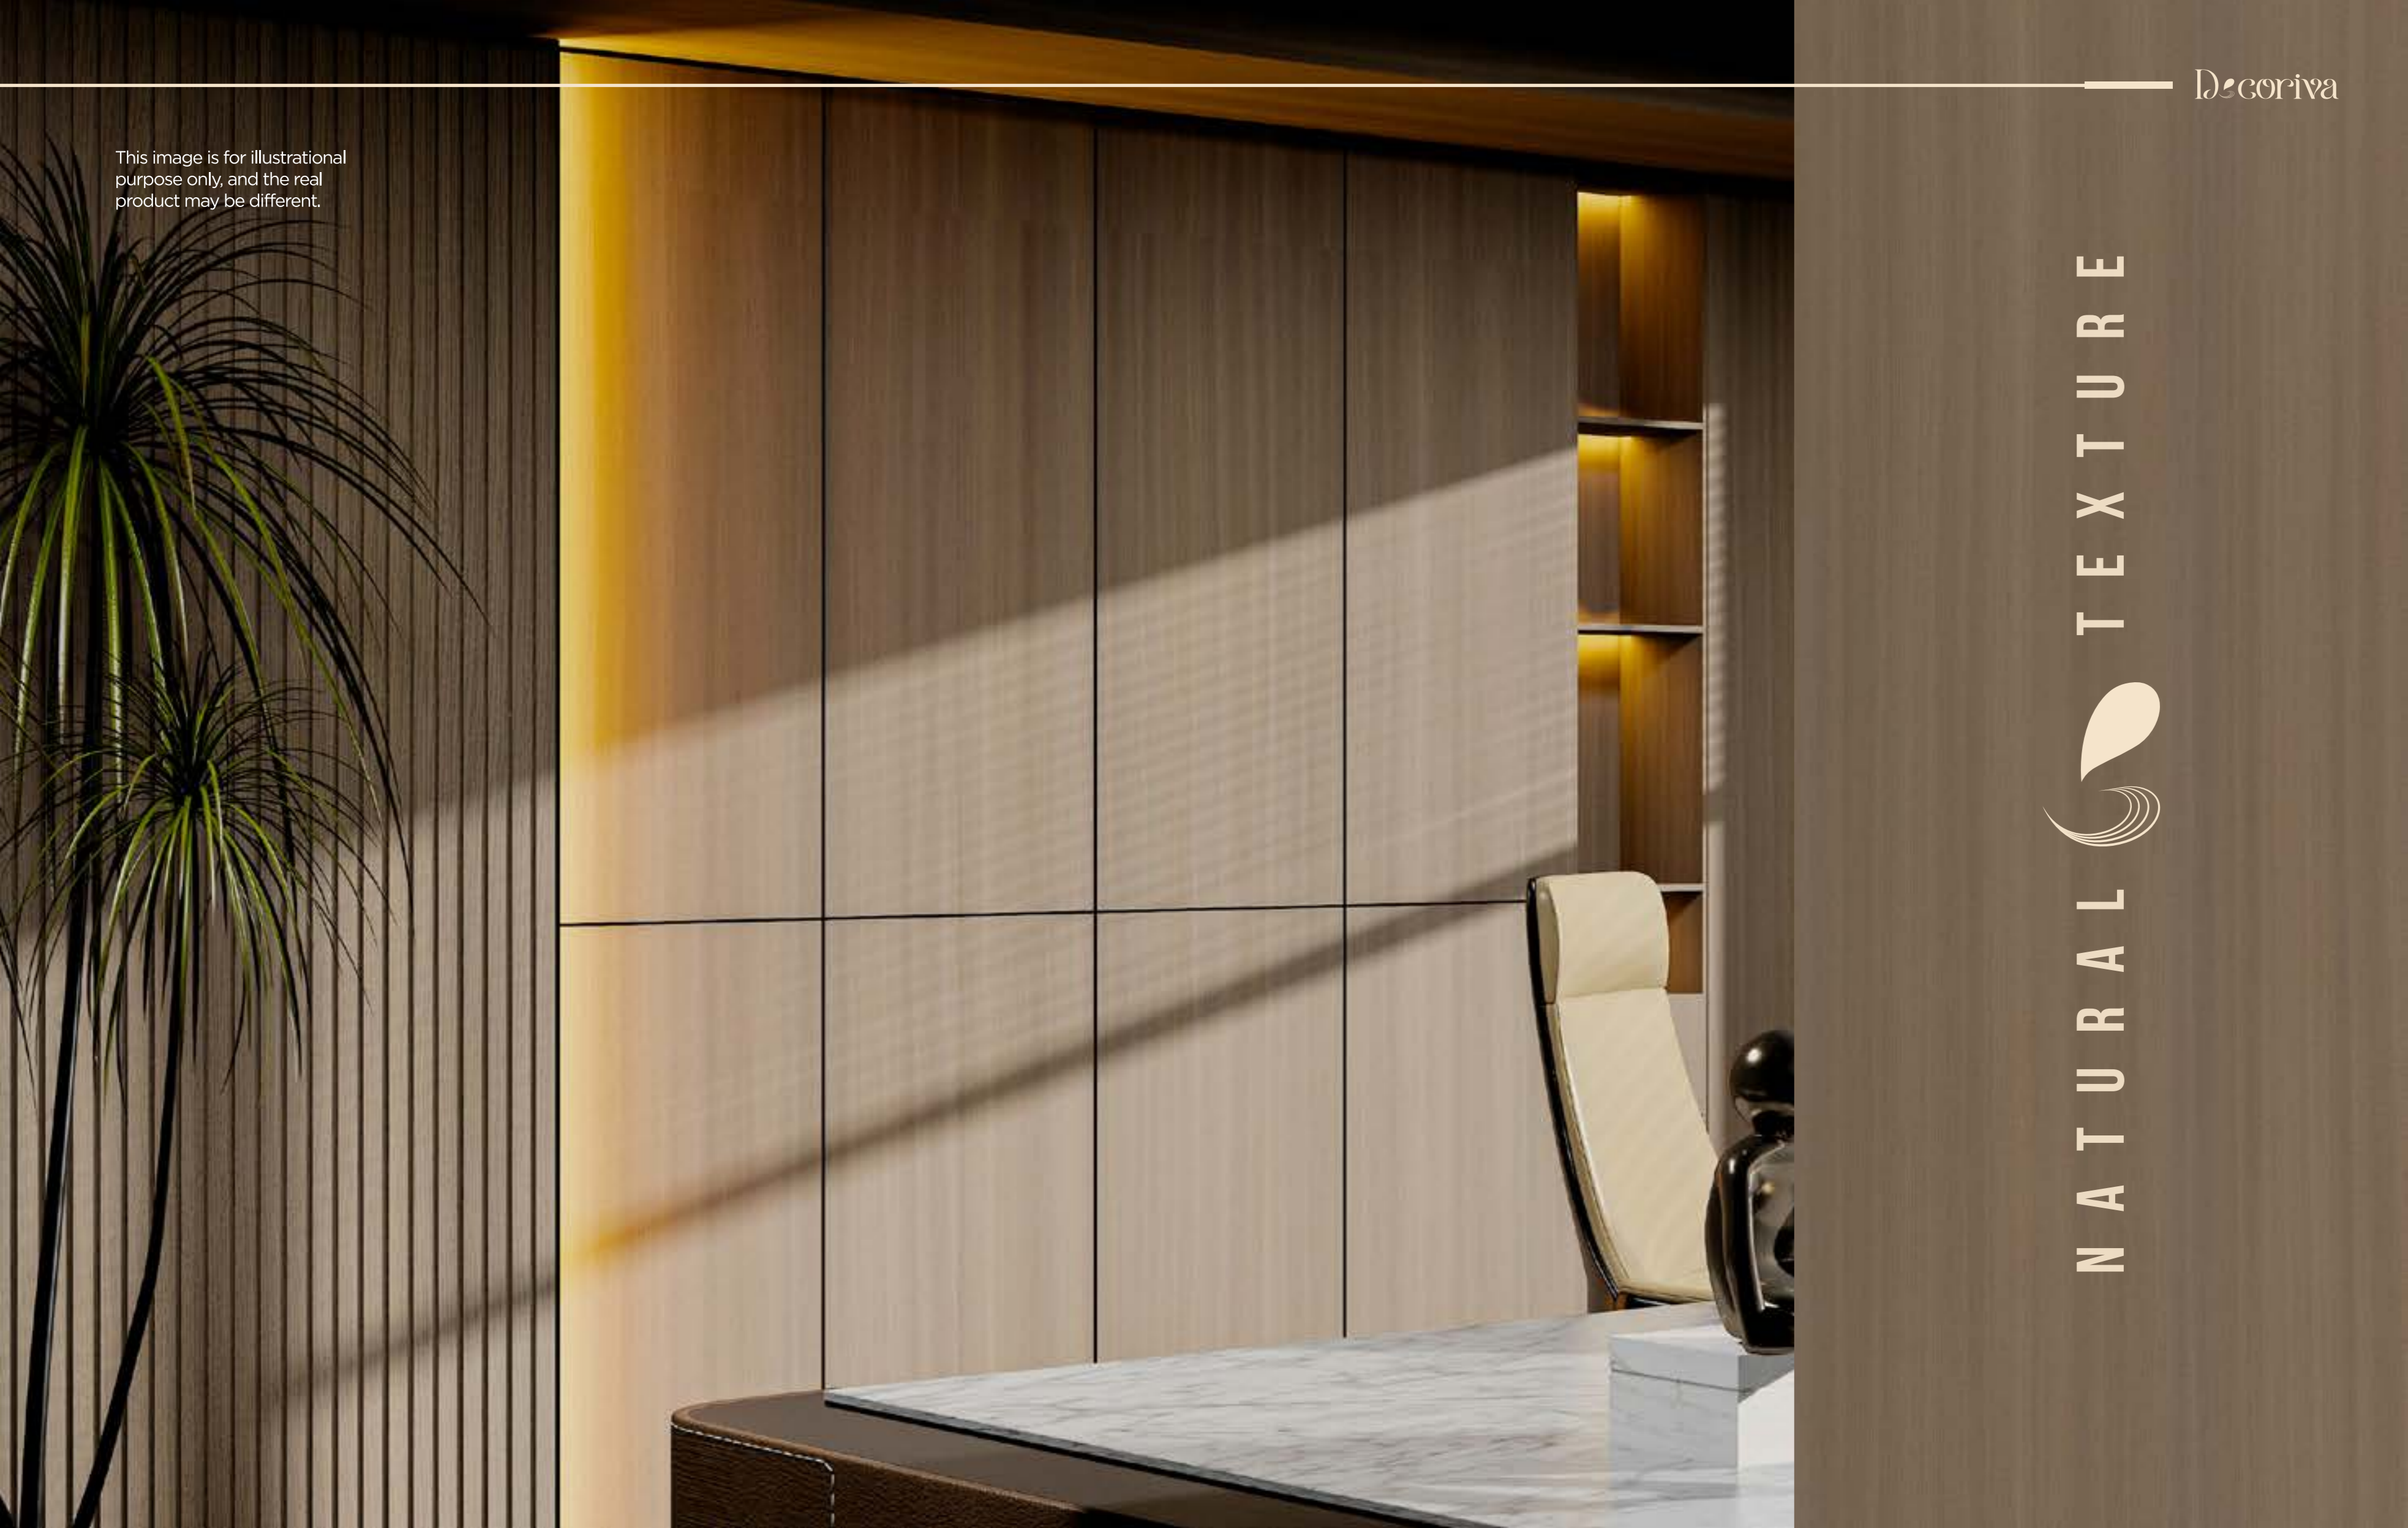

N A T U R A L  T E X T U R E

TECHNICAL SPECS WOOD

	Properties	Test	Unit	Value
Physicl	Density	INHOUSE	KG/MC	600-950
	Hardness	ISO 868	Shore D	46±2
	Water Absorption	ASTM D 570	%	≤0.8
	Tensile Strength	ASTM D 638	MPa	≥17
Mechanical & Electrical	Elongation at break	ASTM D 638	%	≥17
	Charpy Impact Strength	ASTM D 256	J/m	29
	Izod Impact Strength	ASTM D 258	KJ/	≥9.0
	Dielectric Strength	ASTM D 257	Ω M ²	5 × 10
	Coolness hardness	GB/T6739-2006	2H	2H
	Yellowing Resistance	GB/T23983-2009	AE:1.26	AE:1.26
Thermal	Vicat Softening Temperature	ASTM D 648	°C	≥80
	Coefficient of Linear Expansion	ASTM D 1525	Cm/Cm	06-07
	Thermal Conductivity	DIN 52616	W/mk	0.5-0.7

This image is for illustrational purpose only, and the real product may be different.



CLF0060




This image is for illustrational purpose only, and the real product may be different.



CLF 0051



CLF 0052

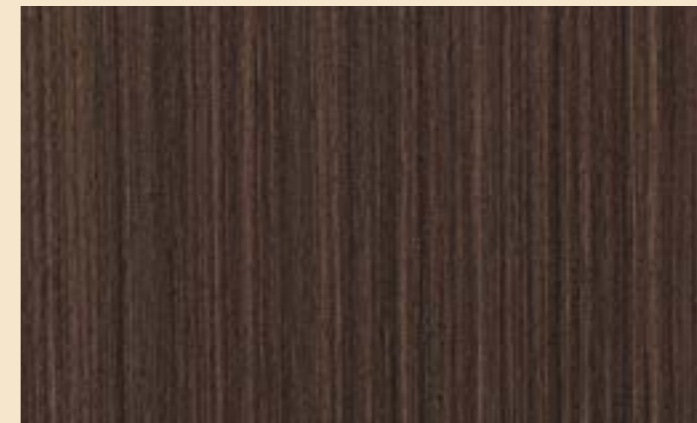

CLF 0053



This image is for illustrational purpose only, and the real product may be different.



CLF 0054



CLF 0055



CLF 0056



This image is for illustrational purpose only, and the real product may be different.



CLF 0057



CLF 0058



CLF 0059



TECHNICAL SPECS WOOD

	Properties	Test	Unit	Value
Physical	Density	INHOUSE	KG/MC	600-950
	Hardness	ISO 868	Shore D	46±2
	Water Absorption	ASTM D 570	%	≤0.8
	Tensile Strength	ASTM D 638	MPa	≥17
Mechanical & Electrical	Elongation at break	ASTM D 638	%	≥17
	Charpy Impact Strength	ASTM D 256	J/m	29
	Izod Impact Strength	ASTM D 258	KJ/ M ²	≥9.0
	Dielectric Strength	ASTM D 257	Ω	5 × 10
	Vicat Softening Temperature (50°C/h , B50N)	ISO 306	°C	75°C
	Chemical Resistance	DIN 68861	very good (1B)	very good (1B)
Thermal	Vicat Softening Temperature	ASTM D 648	°C	≥80
	Coefficient of Linear Expansion	ASTM D 1525	Cm/Cm°C	06-07
	Thermal Conductivity	DIN 52616	W/mk	0.5-0.7

SOFT TOUCH SERIES

Embrace the gentle appeal of soft textures that transform any space into a haven of comfort and tranquility.


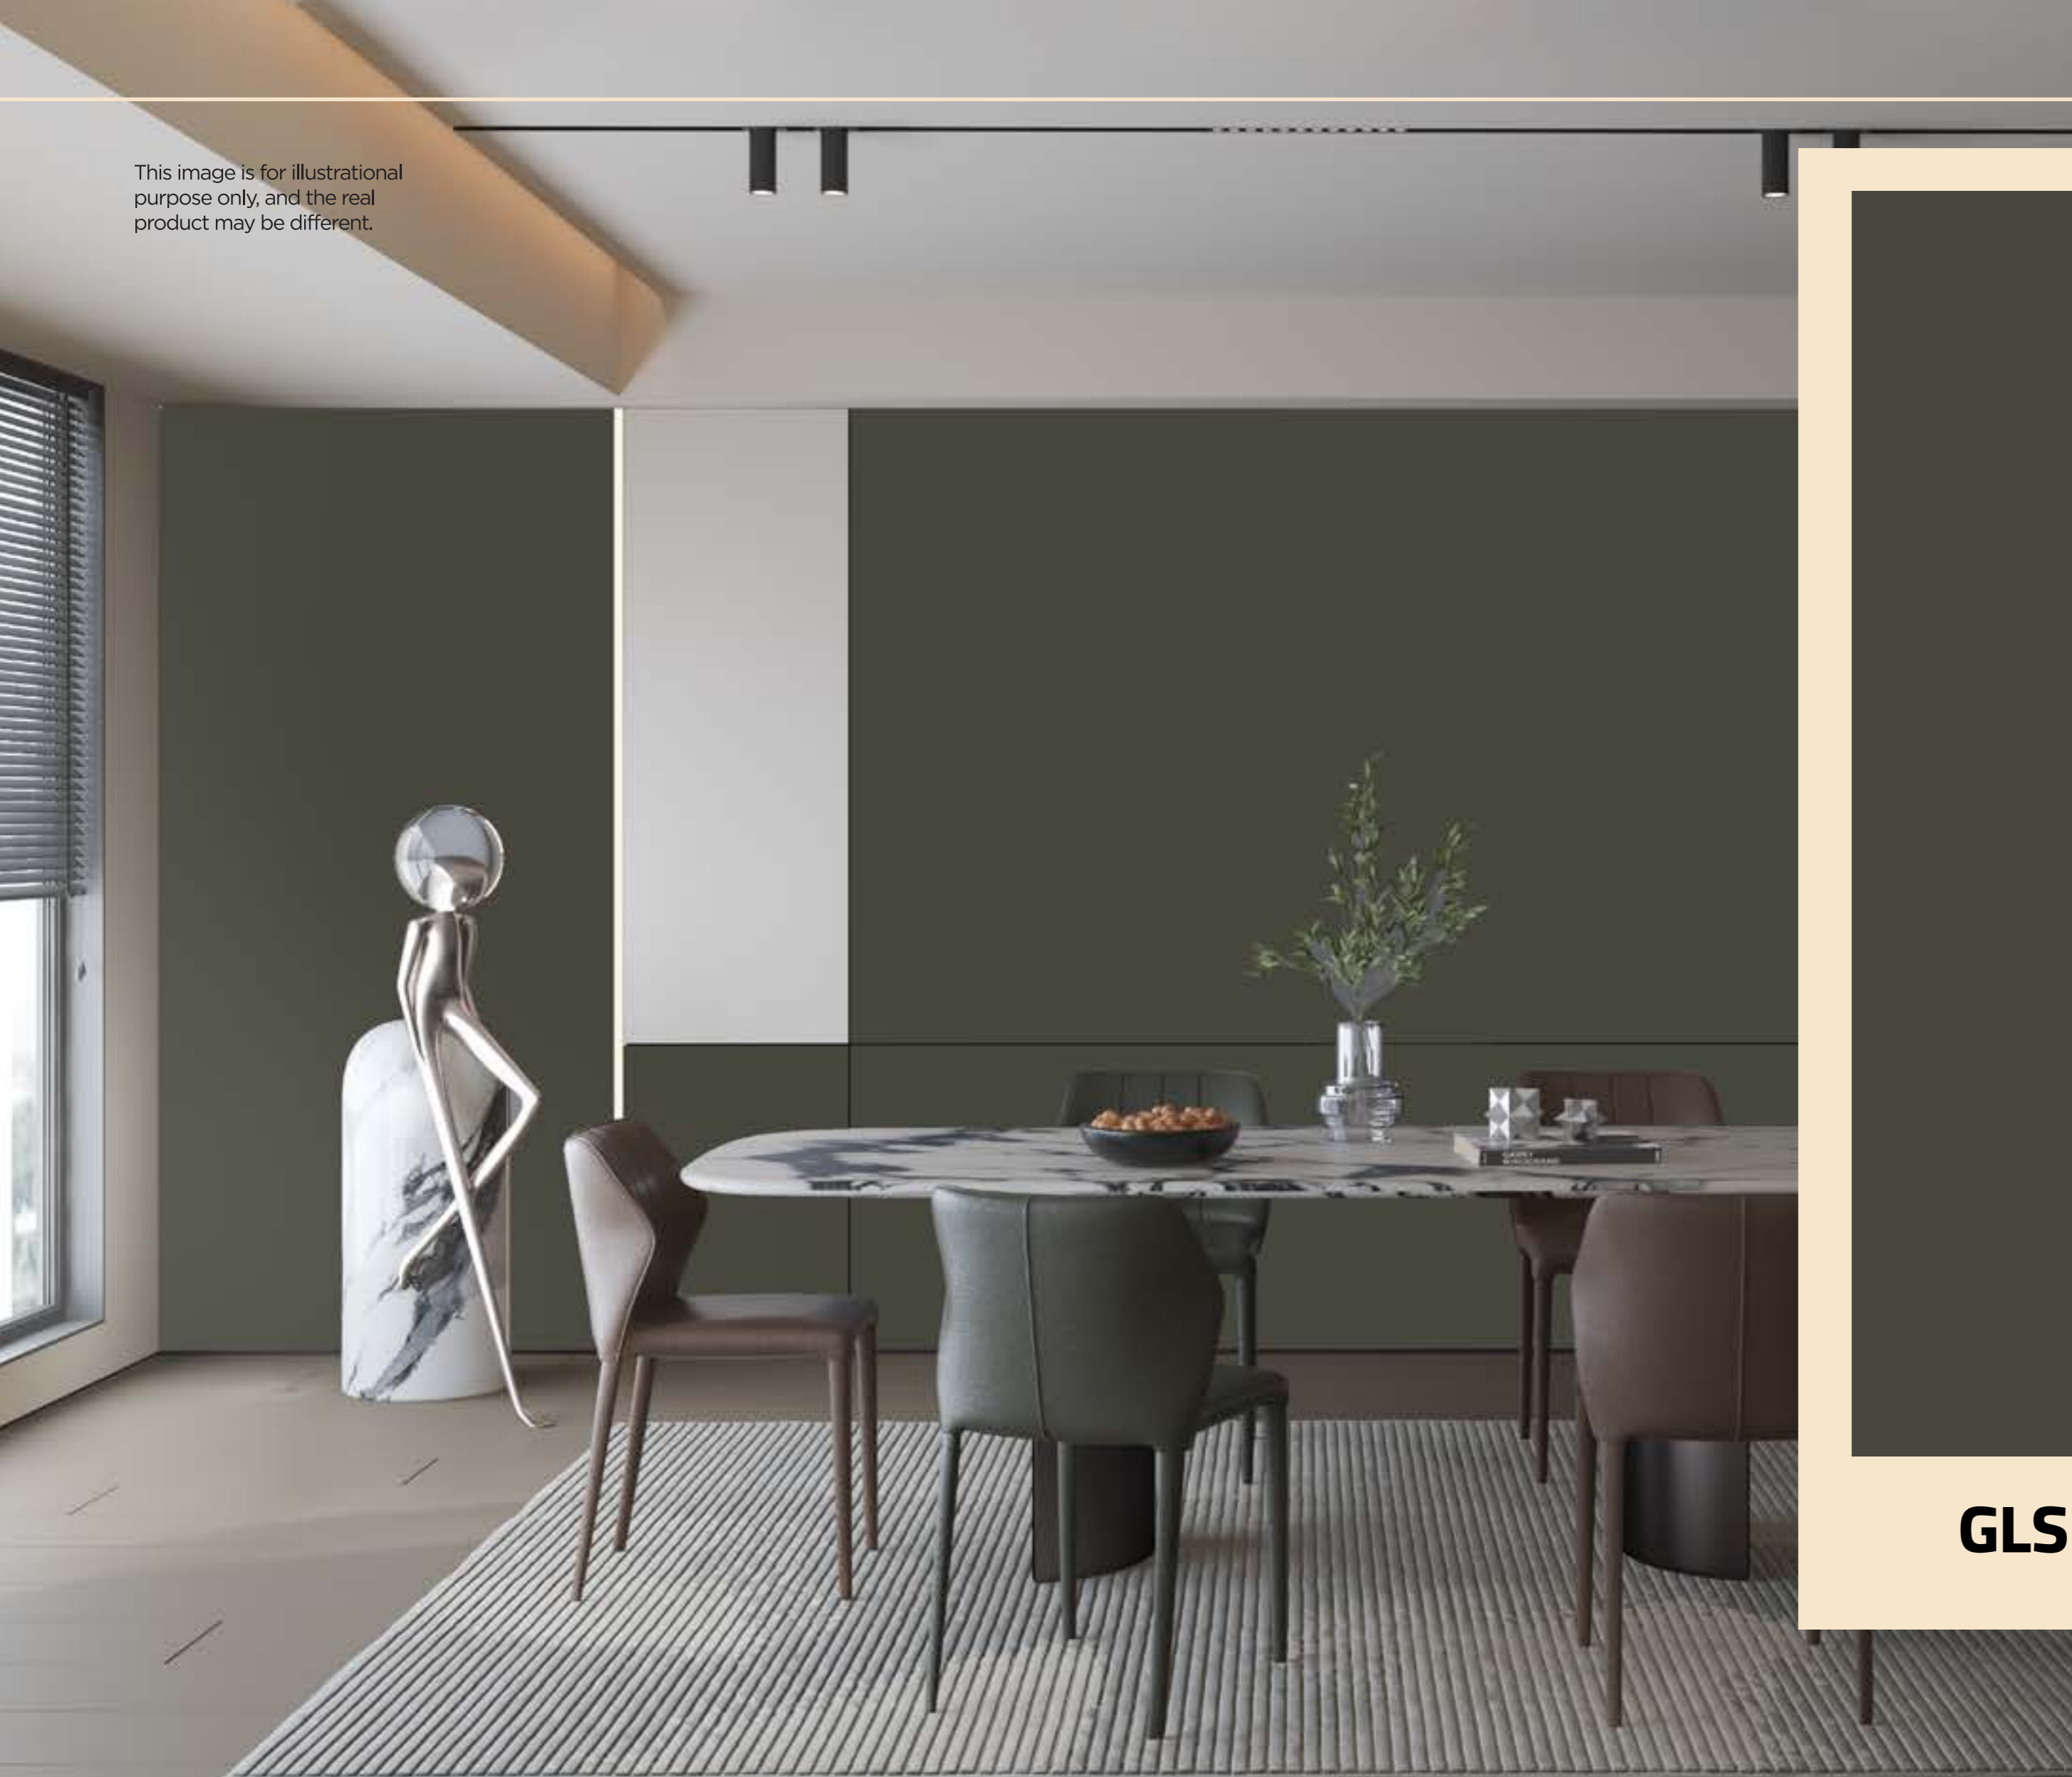
Soft textures, with their delicate touch and soothing presence, effortlessly blend into any decor, adding a layer of warmth and coziness.

Soft textures invite you to experience a new dimension of comfort.

Discover the beauty of softness that not only enhances the aesthetic appeal but also creates an inviting atmosphere, making every moment spent in your space a delightful experience.

Decoriva

This image is for illustrational purpose only, and the real product may be different.



GLS 8910




This image is for illustrational purpose only, and the real product may be different.

GLS 8978




GLS 8990




GLS 8984




This image is for illustrational purpose only, and the real product may be different.



GLS 8953



GLS 8995



GLS 8900



This image is for illustrational purpose only, and the real product may be different.

GLS 8935





TECHNICAL SPECS

SOFT TOUCH


	Properties	Test	Unit	Value
Physical	Density	INHOUSE	KG/MC	600-950
	Hardness	ISO 868	Shore D	46±2
	Water Absorption	ASTM D 570	%	≤0.8
	Tensile Strength	ASTM D 638	MPa	≥17
Mechanical & Electrical	Elongation at break	ASTM D 638	%	≥17
	Charpy Impact Strength	ASTM D 256	J/m	29
	Izod Impact Strength	ASTM D 258	KJ/	≥9.0
	Dielectric Strength	ASTM D 257	Ω M ²	5 × 10
	Light Fastness	ISO 4892-2 / DIN EN 105 B 02	%	≥6
	Chemical Resistance	DIN 68861/1	class 1C	class 1C
	Scratch Resistance	DIN 68861/4	class 4	class 4
Thermal	Vicat Softening Temperature	ASTM D 648	°C	≥80
	Coefficient of Linear Expansion	ASTM D 1525	Cm/Cm°C	06-07
	Thermal Conductivity	DIN 52616	W/mk	0.5-0.7




U - PROFILE

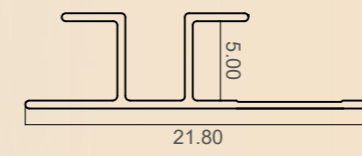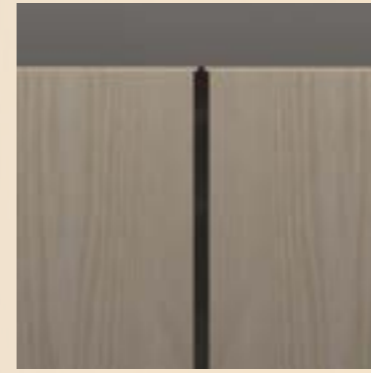


X - PROFILE

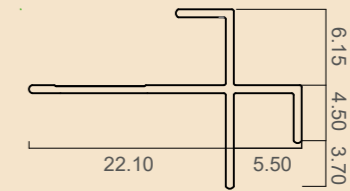


T - PROFILE






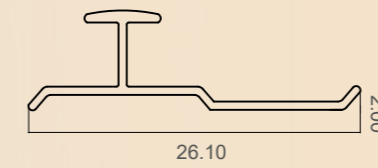


C - PROFILE

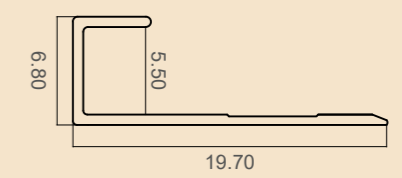

W - PROFILE

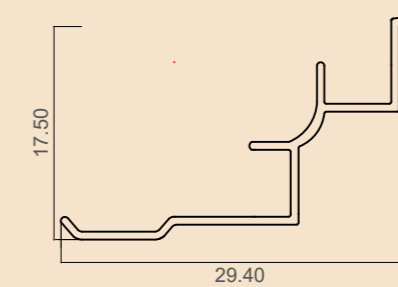

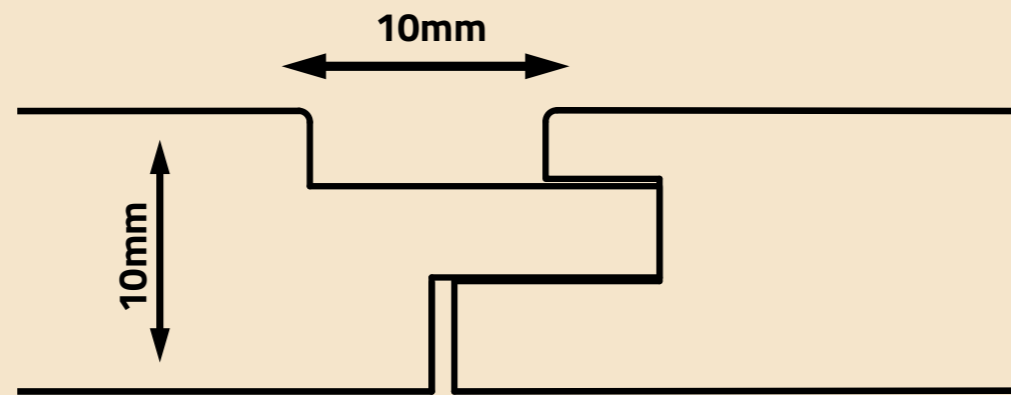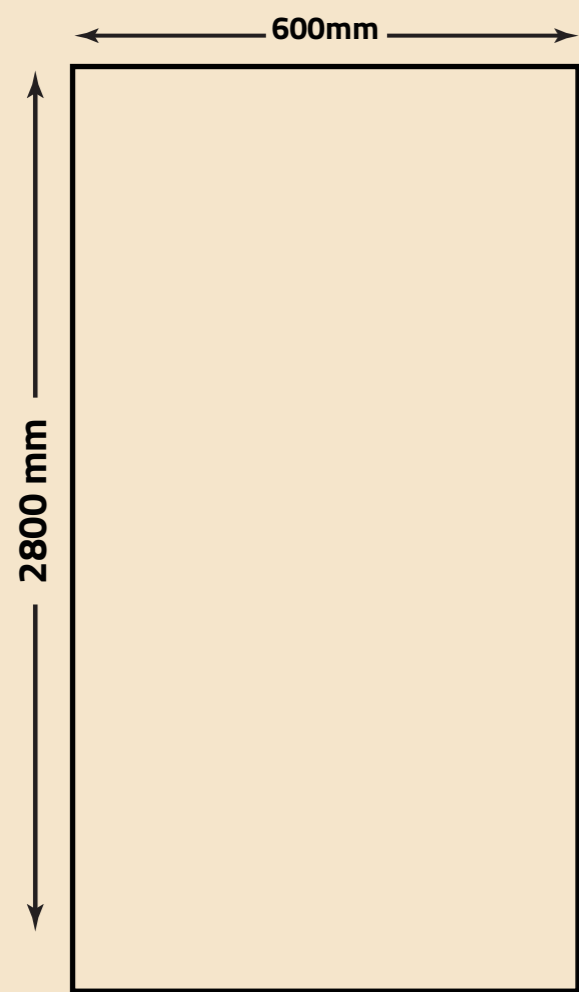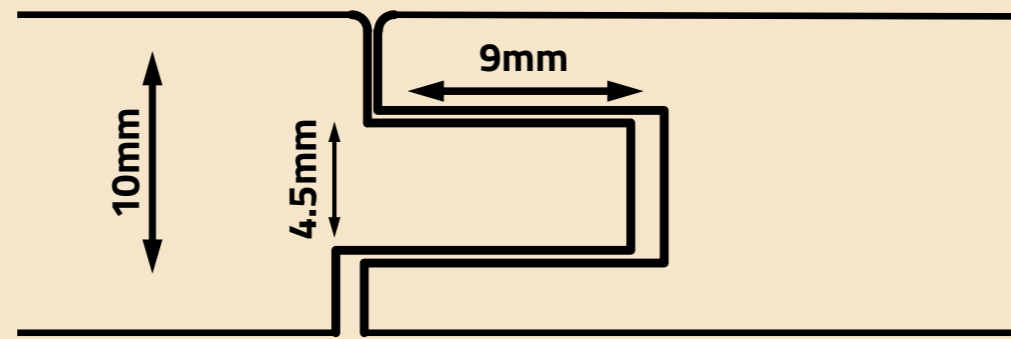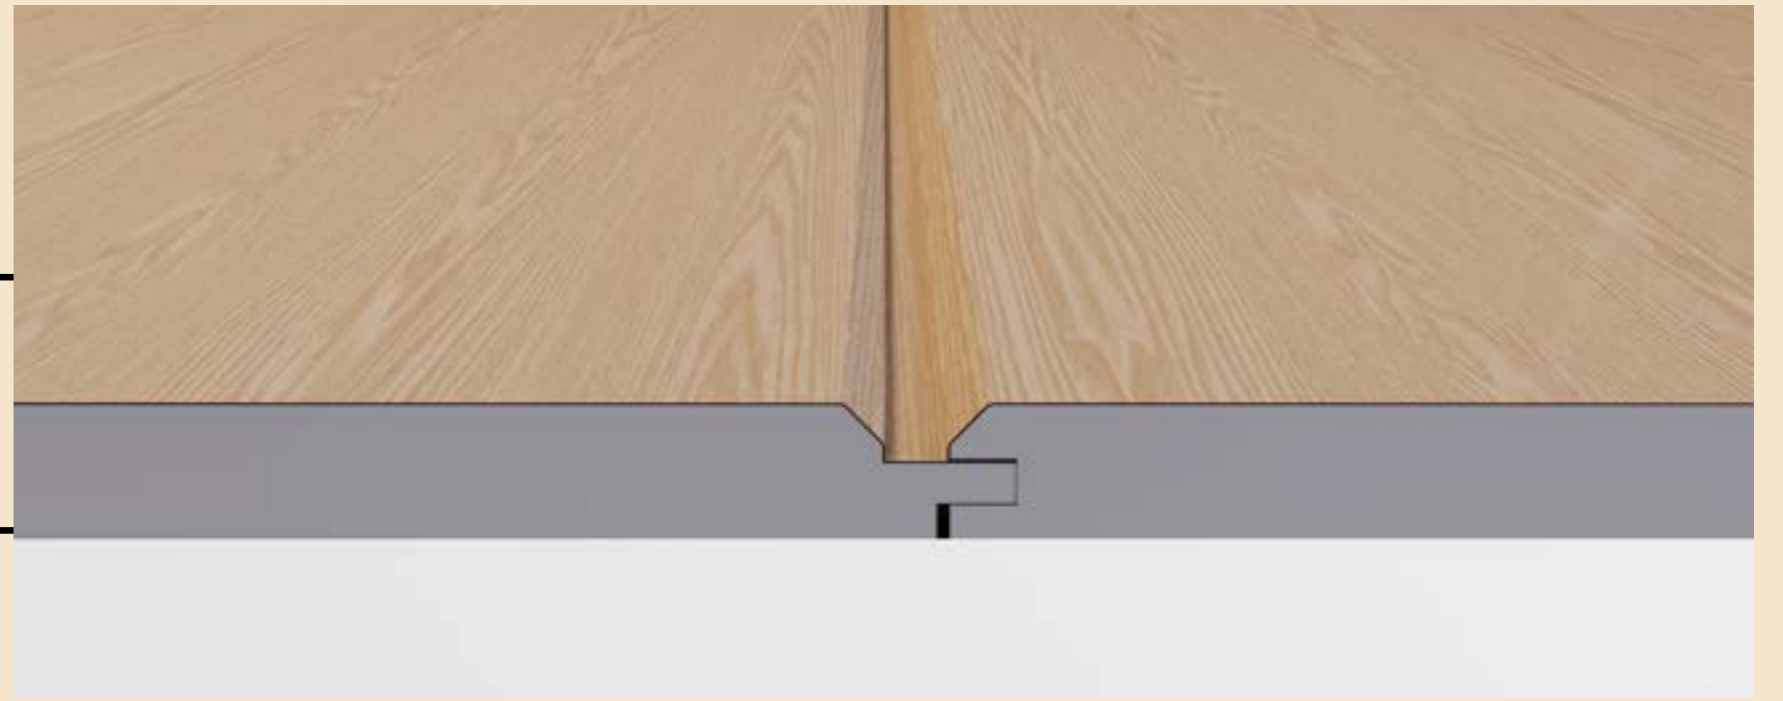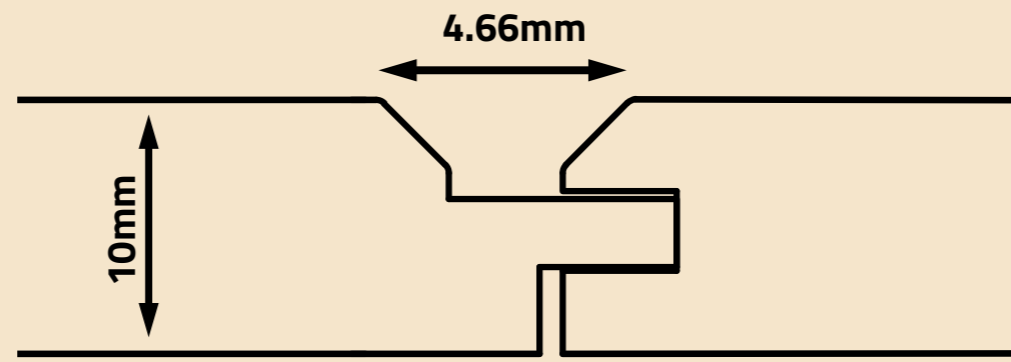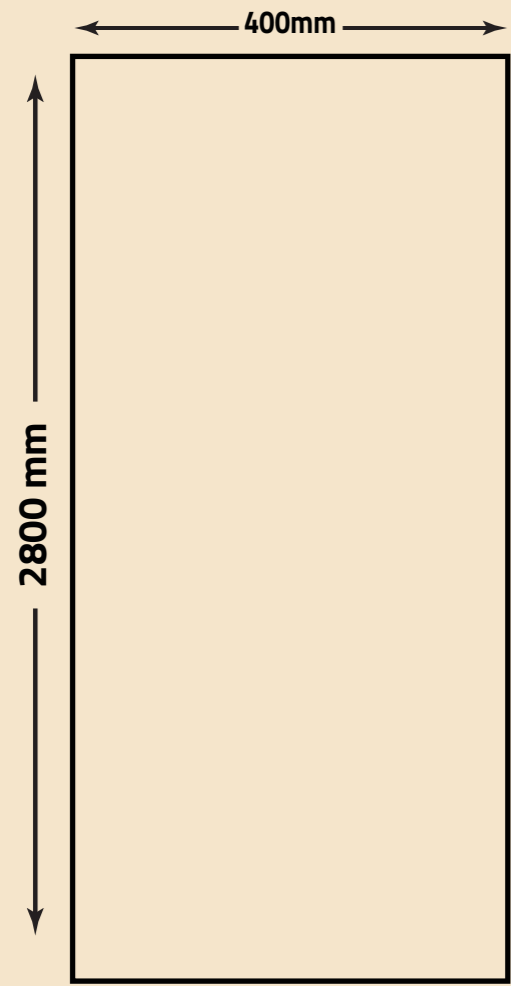

📍 HEAD OFFICE

AL Nasr Road, AL Multaka AL Arabi Buildings
NR 38 Masaken Sheraton -Cairo - Egypt

📍 FACTORIES

Industrial Zone - Anshas, Abaza Street,
NR 12512 - Sharkia - Cairo - Egypt

📍 WAREHOUSES

Trolley Street - Moasaset EL Zakah
Behind Barakat AL-Hajj Sports Club - Cairo - Egypt

📍 الإدارة

38 الملتقى العربى - مساكن شيراتون
طريق النصر - القاهرة - مصر

📍 المصانع

المنطقة الصناعية - أنشاص شارع أباظة قطعة رقم 12512
الشرقية - مصر

📍 المخازن

شارع الترولى مؤسسة الزكاة خلف نادى بركة الحاج الرياضى
القاهرة - مصر

15687
+201022240611

🌐 www.matterian.com

✉ info@matterian.com